



## ATEX DeviceNet Interface Module 4X37A

ATEX and IECEx certified (zone 1, 2, 21, 22) DeviceNet interface module for directly interfacing up to 4 digital ATEX / IECEx load cells via DeviceNet. The interface module type 4X37A can also be used in non-ATEX installations.

Type: 4137A, 4237A, 4337A, 4437A

Interface: DeviceNet



# Special Features

Made in Denmark

DeviceNet output

Weighing module for up to 4 digital load cells

For ATEX / IECEx and non-ATEX applications

Plug-and-play installation with Eilersen digital load cells

Advanced digital filters (configurable)

A "Digital Junction Box" that can be mounted near the load cells or in a central panel

Small Form Factor

Setup via dip switches


For ATEX / IECEx when supplied by power supply type 4051A

The power supply 4051A and module type 4X37A must

be installed outside the hazardous zone

Application software can be made upon request

# Dimensions (mm)

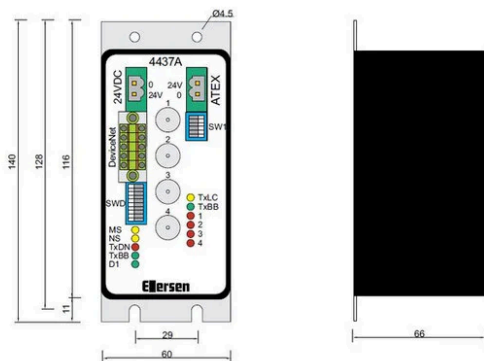

# Specifications

Parameter	Unit	Data
Input		Up to 4 digital load cells
Output		DeviceNet
Non-ATEX: Standard Power Supply	Vdc	24Vdc $\pm$ 5%, min. 2A
ATEX: Safe Power Supply	Vdc	ATEX certified Power Supply type 4051A
Operating temperature range	$^{\circ}$ C	5 to 50
Weight	kg	0.5
Housing		Anodized Aluminium
Mounting		Mounting base or DIN rail



# Options

Prepared for panel mounting on DIN rail

Mounted in stainless steel housing

Customized application software

OEM version

Copyright © 2025 Eilersen / [Cookie policy](#) / [Privacy policy](#) / [Disclaimer and Legal information](#)

