

## ATEX / IECEx Certified Power Supply 4051A

ATEX and IECEx certified (zone 1, 2, 21, 22) power supply type 4051A used for supplying 4XXXA interface modules when used in ATEX / IECEx rated applications. The 4051A power supply and 4XXXA interface module must be installed in safe area i.e. outside the ATEX zone.

Type:	4051A
Interface	ATEX / IECEx power supply



# Special Features

Made in Denmark

ATEX and IECEx certified power supply for Eilersen

digital weighing modules type 4XXXA

For hazardous applications in ATEX / IECEx Zone

1, 2, 21 or 22

The power supply type 4051A and module type 4XXXA


must be installed outside the hazardous zone

Small Form Factor

Input: Standard power supply 24 Vdc, 1A

Output: Safe 24 Vdc, 0.2A output

# Dimensions (mm)

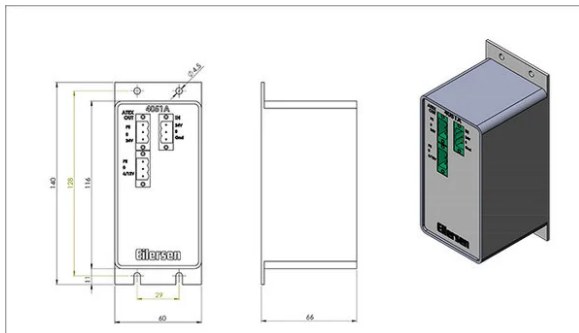

# Specifications

Parameter	Unit	Data
Input		24Vdc $\pm$ 5%, min. 2A
Output		Safe ATEX power supply for 4XXXA modules
Standard Power Supply	Vdc	24Vdc $\pm$ 5%, min. 2A
Operating temperature range	$^{\circ}$ C	5 to 50
Weight	kg	0.7
Housing		Anodized Aluminium
Mounting		Mounting base or DIN rail



# Options

Prepared for panel mounting on DIN rail

Mounted in stainless steel housing

OEM version

Copyright © 2025 Eilersen / [Cookie policy](#) / [Privacy policy](#) / [Disclaimer and Legal information](#)

