



Profibus DP Interface Module MCE2035

Profibus DP interface module for interfacing up to 8 digital non-ATEX load cells via Profibus DP.

Type:	MCE2035
Interface	Profibus DP

Special Features

Made in Denmark


Profibus DP communication module for interfacing Eilersen digital load cells to a Profibus DP Master device (PLC).

The module can be used for up to 8 digital load cells and transmits the weight and status for each individual load cell.

The module offers plug-and-play installation with Eilersen pre-calibrated digital load cells and the module is supplied with a GSD file for easy installation.

Application software can be made upon request.

Dimensions (mm)

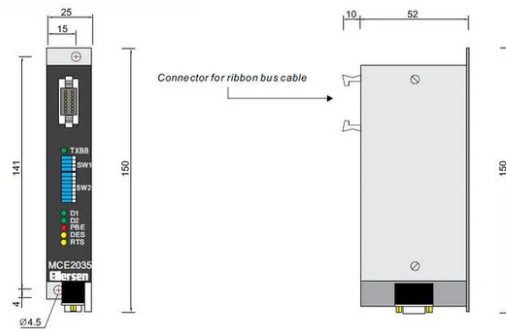

Specifications

Parameter	Unit	Data
Input		Up to 8 digital load cells generation 2000
Output		Profibus DP
Standard Power Supply	Vdc	24Vdc \pm 5%, min. 2A
Operating temperature range	$^{\circ}$ C	-10 to 50
Weight	kg	0.2
Housing		Anodized Aluminium
Mounting		Mounting base or DIN rail

Options

Prepared for panel mounting on DIN rail

Mounted in stainless steel housing

Customized application software

OEM version

Copyright © 2025 Eilersen / [Cookie policy](#) / [Privacy policy](#) / [Disclaimer and Legal information](#)