



Terminal Module MCE9601

Connection between Eilersen RS485 load cell bus at one side and 24Vdc Power Supply and Eilersen digital weighing terminals on the other side.

Type:

MCE9601

Interface

24Vdc supply and Eilersen RS485 load cell bus


Special Features

Made in Denmark

Connection between Eilersen Electric Digital Load Cell bus at one side and 24VDC Power Supply and Eilersen digital weighing terminals on the other side

Dimensions (mm)

Dimensions (mm)

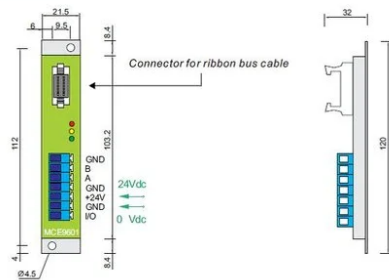

Specifications

Parameter	Unit	Data
Input		Up to 16 digital load cells generation 2000
Output		RS485 BEEBus
Standard Power Supply	Vdc	24Vdc \pm 5%, min. 2A
Operating temperature range	°C	-10 to 50
Weight	kg	0.1
Housing		Anodized Aluminium
Mounting		Mounting base or DIN rail

Options

Prepared for panel mounting on DIN rail

Mounted in stainless steel housing

OEM version

Copyright © 2025 Eilersen / [Cookie policy](#) / [Privacy policy](#) / [Disclaimer and Legal information](#)